


DESCRIPTION:

The JX080K SCR provides high dV/dt rate with strong resistance to electromagnetic interface. It is especially recommended for use on residual current circuit breaker, straight hair, igniter etc. Package TO-252 is RoHS compliant.




MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	8	A
V_{DRM} / V_{RRM}	800	V
I_{GT}	"200	A

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-110	
Repetitive peak off-state voltage ($T_j=25^\circ\text{C}$)	V_{DRM}	800	V
Repetitive peak reverse voltage ($T_j=25^\circ\text{C}$)	V_{RRM}	800	V
Average on-state current ($T_c 0.55^\circ\text{C}$)	$I_{T(AV)}$	5	A
RMS on-state current ($T_c 0.55^\circ\text{C}$)	$I_{T(RMS)}$	8	A
Non repetitive surge peak on-state current ($t_p=10\text{ms}$, $T_j=25^\circ\text{C}$)	I_{TSM}	80	A
Non repetitive surge peak on-state current ($t_p=8.3\text{ms}$, $T_j=25^\circ\text{C}$)		88	
I^2t value for fusing ($t_p=10\text{ms}$, $T_j=25^\circ\text{C}$)	I^2t	32	A^2s
Critical rate of rise of on-state current ($I_G=2 \times I_{GT}$, $f=100\text{Hz}$, $T_j=110^\circ\text{C}$)	di/dt	100	A/s
Peak gate current ($t_p=20\text{ }\mu\text{s}$, $T_j=110^\circ\text{C}$)	I_{GM}	4	A
Average gate power dissipation ($T_j=110^\circ\text{C}$)	$P_{G(AV)}$	1	W
Peak gate power	P_{GM}	10	W

ORDERING INFORMATION

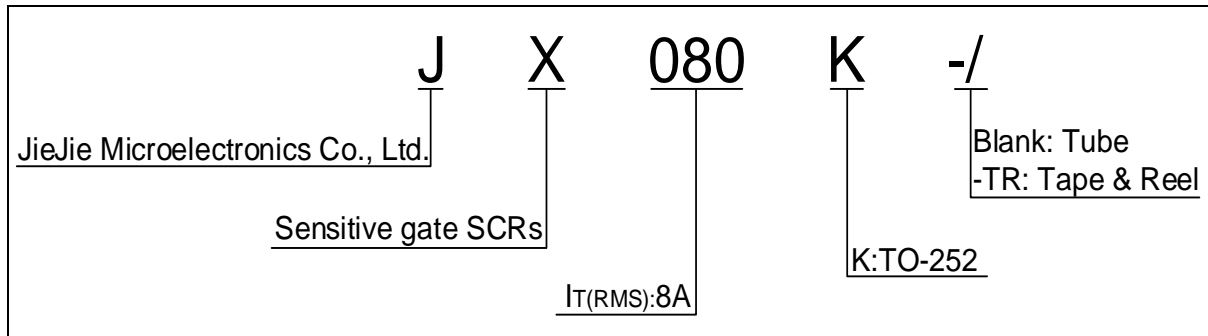

MARKING


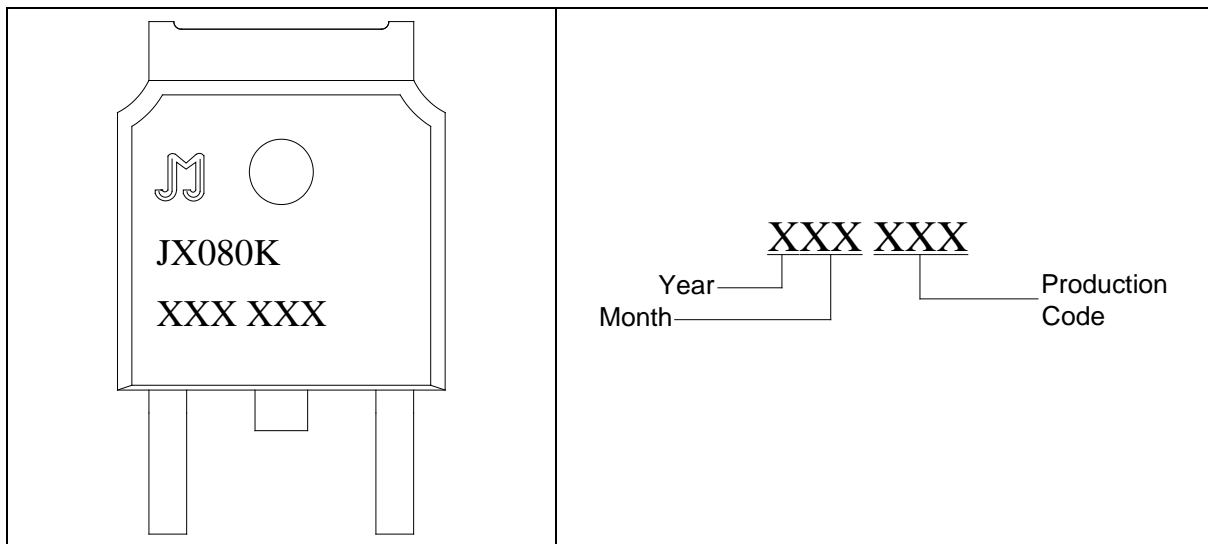


FIG.1:

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

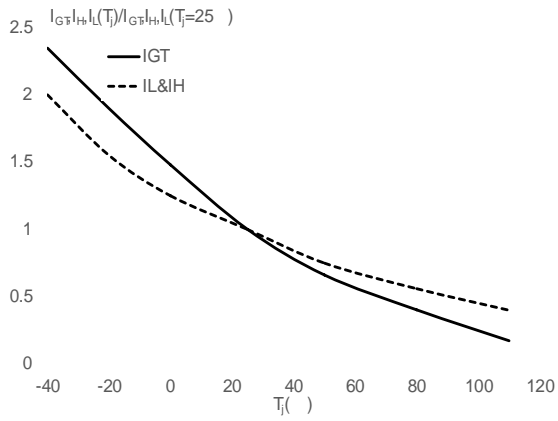

ORDERING INFORMATION


Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(μ A)	Package	Base qty. (pcs)	Delivery mode
JX080K	800	200	TO-252	80	Tube
JX080K-TR				2,500	Tape & Reel

Document Revision History

Date	Revision	Changes
May 18, 2023	A.1.0	Last update
Oct.22, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

PACKAGING INFORMATION • Dimensions

Millimeters
Typ. Mx.

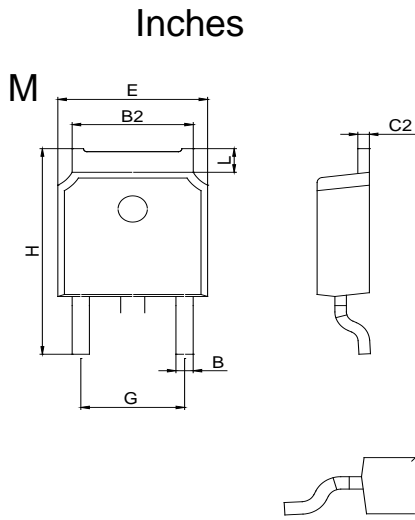

			in.	Typ.	Mx.
A	2.10	2.50	0.083		0.098
A2	0	0.15	0		0.006
B	0.66	0.86	0.026		0.034
B2	5.18	5.48	0.202		0.216
C	0.40	0.60	0.016		0.024
C2	0.44	0.58	0.017		0.023
D	5.90	6.30	0.232		0.248
D1	6.40	6.80	0.252		0.268
	4.63		0.182		
G	4.47	4.67	0.176		0.184
G1	2.18	2.38	0.086		0.094
L	1.09	1.21	0.043		0.048
L2	1.35	1.65	0.053		0.065



