


ACJP01W-600SW 1A TRIAC

Rev.A.1.1


DESCRIPTION:

The ACJP01W-600SW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJP01W-600SW embeds a TVS structure to absorb the inductive turn-off



| | | | |
|--|-------------|-----|----|
| Average gate power dissipation ($T_j=125$) | $P_{G(AV)}$ | 0.1 | W |
| Peak gate power | P_{GM} | 2 | W |
| Peak pulse voltage ($T_j=25$; non-repetitive, off-state; FIG.8) | V_{pp} | 4.5 | kV |

ORDERING INFORMATION

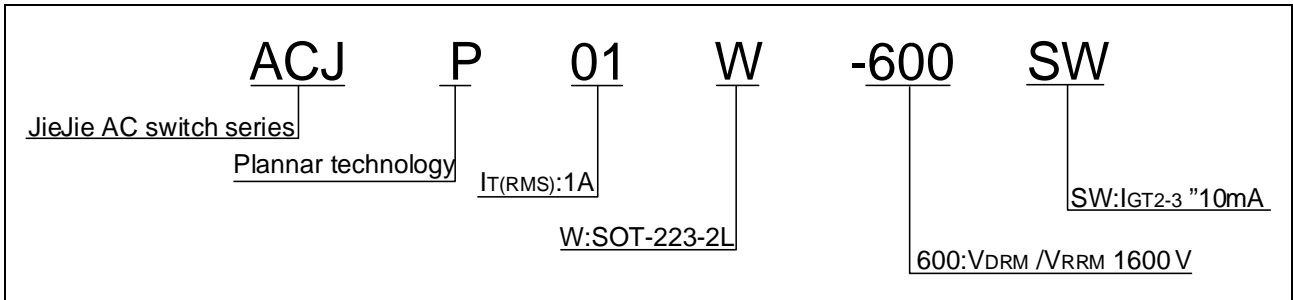

MARKING




FIG.1: Maximum power dissipation versus RMS on-state current

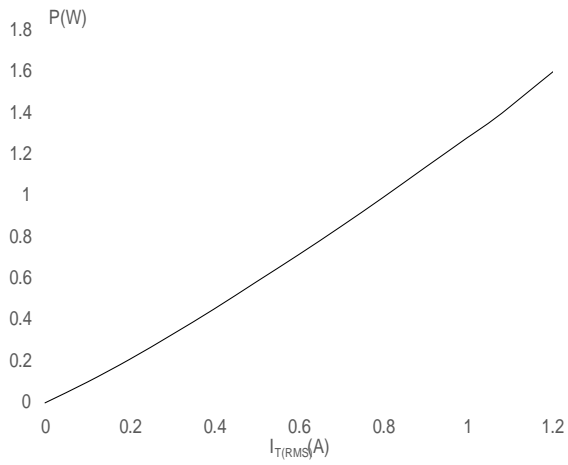


FIG.2: RMS on-state current versus case temperature


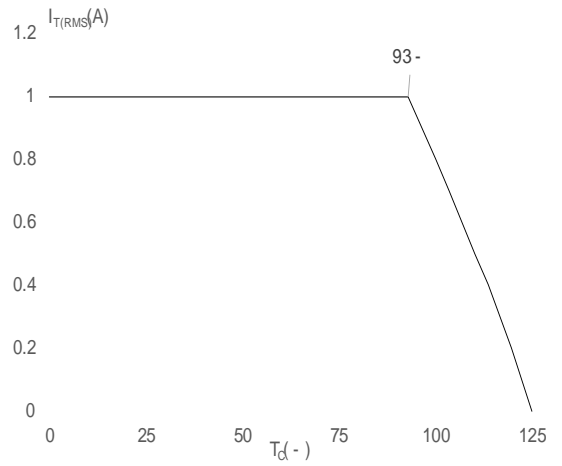


FIG.3: RMS on-state current versus ambient temperature (printed circuit board FR4,copper WKLFNQHV V P IXOO F\FOH

FIG.4: Surge peak on-state current versus number of cycles (1000S)

FIG.8 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards R89™ (s' ?6—

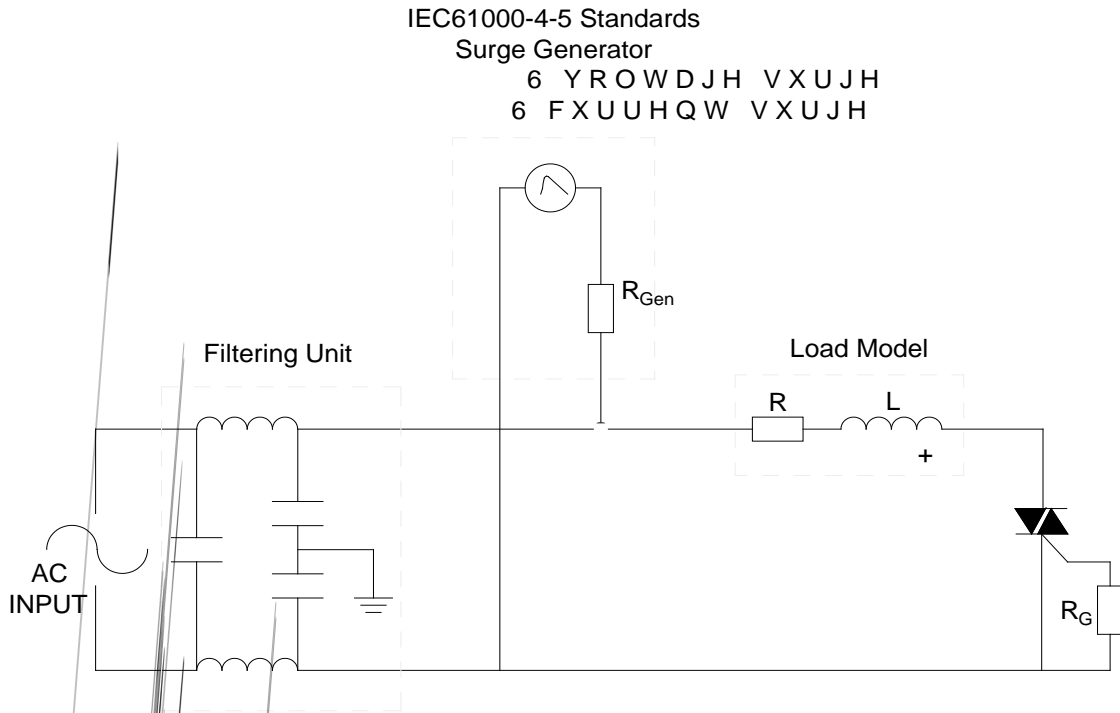

ORDERING INFORMATION

| Order code | Voltage V_{DRM}/V_{RRM} (V) | IGT(mA) | Package | Base qty. (pcs) | Delivery mode |
|------------|----------------------------------|---------|---------|--------------------|------------------|
|------------|----------------------------------|---------|---------|--------------------|------------------|

ACJP01W-600SW

600

DELIVERY MODE

| Ref. | Dimensions | | | | | |
|------|-------------|-------|-------|--------|------------------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| W | - | | 12.30 | - | | 0.482 |
| E | 1.65 | 1.75 | 1.85 | 0.065 | 0.069 | 0.073 |
| F | 5.45 | 5.50 | 5.55 | 0.215 | 0.217 | 0.219 |
| D0 | | 1.55 | 1.60 | | 0.061 | 0.063 |
| D1 | | - | - | | | |
| P0 | 3.90 | 4.00 | 4.10 | 0.154 | 0.157 | 0.161 |
| P1 | 7.90 | 8.00 | 8.10 | 0.311 | 0.315 | 0.319 |
| P2 | 1.95 | 2.00 | 2.05 | 0.077 | 0.079 | 0.081 |
| 10P0 | 39.80 | 40.00 | 40.20 | 1.567 | 1.575 | 1.583 |
| A0 | 6.85 | 6.95 | 7.05 | 0.269 | 0.273 | 0.276 |
| B0 | 7.15 | 7.25 | 7.35 | 0.280 | 0.284 | 0.288 |
| K0 | 1.95 | 2.05 | 2.15 | | 0.080 | 0.084 |
| T | 0.20 | 0.25 | 0.30 | | | |

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.
Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.