



DESCRIPTION:

The JST06H-600CW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. JST06H-600CW snubberless triac is especially recommended for use on inductive loads. From T2 terminals to external heatsink. Package TO-251 is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T <sub>stg</sub>	-40-150	
Operating junction temperature range	T <sub>j</sub>	-40-125	
Repetitive peak off-state voltage (T <sub>j</sub> =25 °C)	V <sub>DRM</sub>	600	V
Repetitive peak reverse voltage (T <sub>j</sub> =25 °C)	V <sub>RPM</sub>	600	V
RMS on-state current (T <sub>c</sub> = 91 °C)	I <sub>T(RMS)</sub>	6	A

Non repetitive surge peak on-state current (full cycle, I<sub>DRM</sub>=20A, T<sub>j</sub>=25°C) I<sub>TSM</sub>

I<sub>TSM</sub>




ORDERING INFORMATION

J    ST    06    H    -600    CW  
JieJie Microelectronics Co., Ltd.    Triacs

600:V<sub>DRM</sub> /V<sub>600</sub>


FIG.1:

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards JieJie

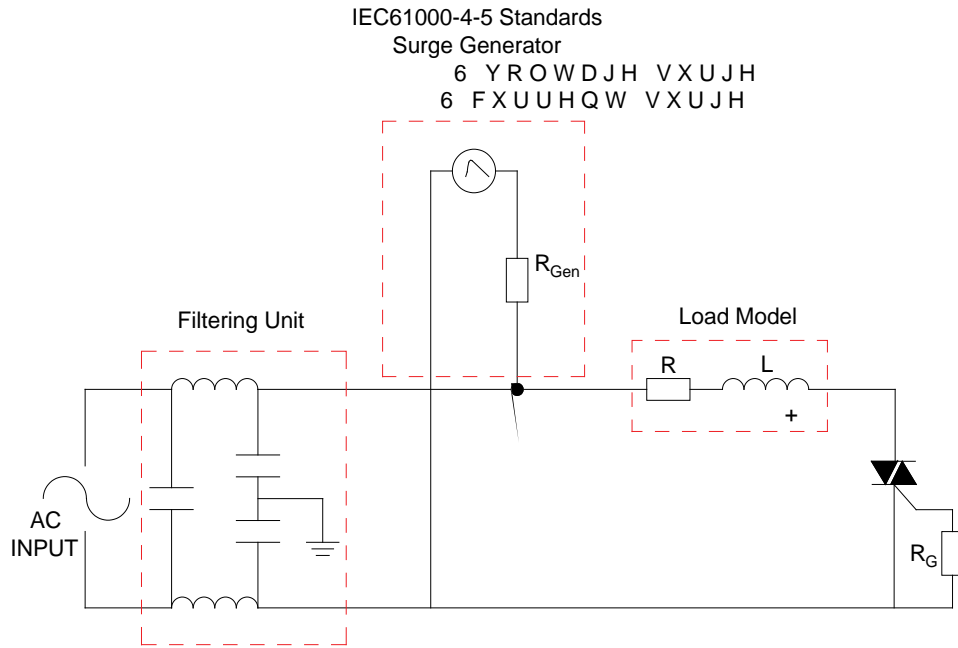



PACKAGE MECHANICAL DATA

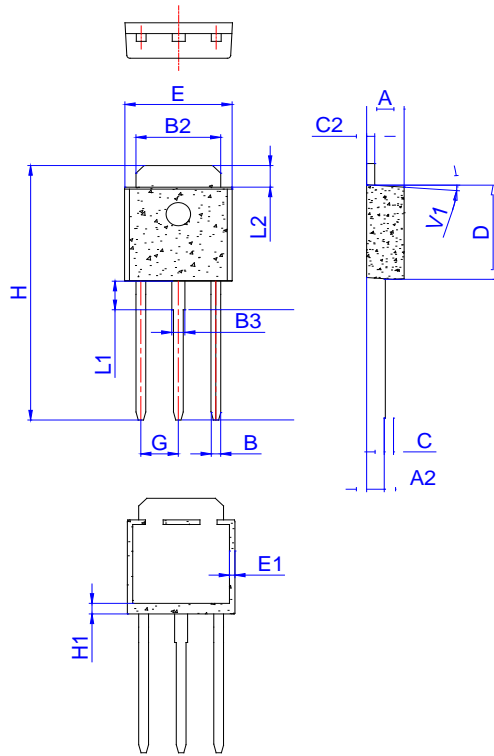

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.20		2.40	0.086		0.095
A2	1.00		1.30	0.039		0.051
B	0.50		0.70	0.020		0.028
B2	5.10		5.40	0.200		0.213
B3						
C						
C2						
D						
E						
E1	0.60		1.00	0.024		0.039
F						
G						
H	16.00		17.00	0.630		0.669
H1	1.45		1.85	0.057		0.073
I						
L1						

Information furnished in this document is believed to be accurate and reliable. However,