



(T<sub>j</sub>=25 unless otherwise specified)


| Symbol          | Test Condition                                                                | Quadrant | Value |     | Unit |
|-----------------|-------------------------------------------------------------------------------|----------|-------|-----|------|
| I <sub>GT</sub> | V <sub>D</sub> =12V R <sub>L</sub> =33Ω                                       | - -      | MAX.  | 5   | mA   |
|                 |                                                                               |          |       | 10  |      |
| V <sub>GT</sub> |                                                                               | ALL      | MAX.  | 1.3 | V    |
| V <sub>GD</sub> | V <sub>D</sub> =V <sub>DRM</sub> T <sub>j</sub> =125<br>R <sub>L</sub> =3.3kΩ | ALL      | MIN.  | 0.2 | V    |
| I <sub>L</sub>  | I <sub>G</sub> =1.2I <sub>GT</sub>                                            | - -      |       | 5   |      |
|                 |                                                                               |          |       |     |      |






**JST131V-800D**

FIG.8 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

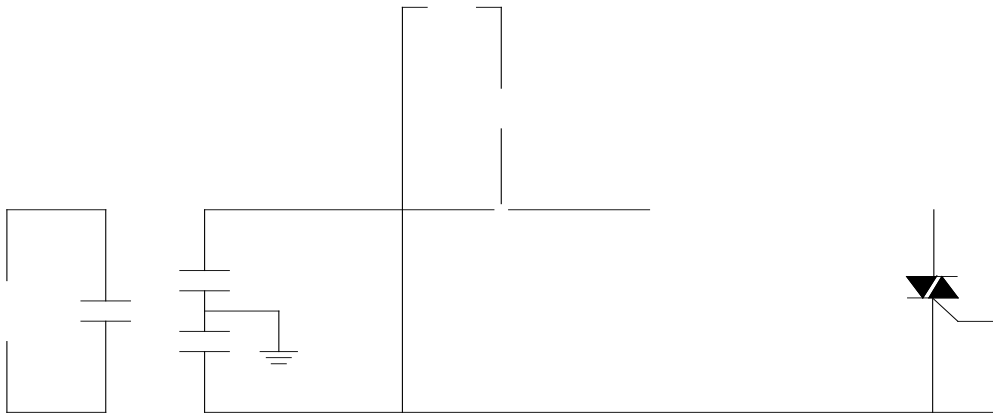




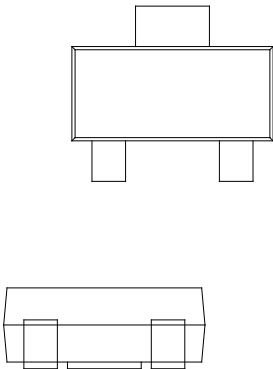

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    | 1.50        | 1.60 | 1.80 | 0.059  | 0.063 | 0.071 |
| A1   | 0.01        | 0.06 | 0.10 | 0.001  | 0.002 | 0.004 |
| B    | 2.90        | 3.00 | 3.10 | 0.114  | 0.118 | 0.122 |
| B1   | 0.60        | 0.70 | 0.80 | 0.024  | 0.028 | 0.031 |
| C    | 0.22        | 0.26 | 0.32 | 0.009  | 0.010 | 0.013 |
| D    | 6.30        | 6.50 | 6.70 | 0.248  | 0.256 | 0.264 |
| E    | 3.30        | 3.50 | 3.70 | 0.130  | 0.138 | 0.146 |
| F    | 4.40        |      |      | 0.173  |       |       |
| F1   | 2.20        |      |      | 0.087  |       |       |
| G    | 0.50        |      | 1.00 | 0.020  |       | 0.039 |
| H    | 1.50        | 1.75 | 2.00 | 0.059  | 0.069 | 0.079 |
| J    | 6.70        | 7.00 | 7.30 | 0.264  | 0.276 | 0.287 |
| K    |             |      |      |        |       |       |
|      |             |      |      |        |       |       |



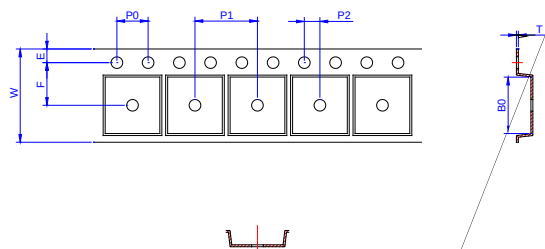

| Ref. | Dimensions  |       |       |        |       |       |
|------|-------------|-------|-------|--------|-------|-------|
|      | Millimeters |       |       | Inches |       |       |
|      | Min.        | Typ.  | Max.  | Min.   | Typ.  | Max.  |
| W    | -           |       | 12.30 | -      |       | 0.482 |
| E    | 1.65        | 1.75  | 1.85  | 0.065  | 0.069 | 0.073 |
| F    | 5.45        | 5.50  | 5.55  | 0.215  | 0.217 | 0.219 |
| D0   |             | 1.55  | 1.60  |        | 0.061 | 0.063 |
| D1   |             | -     | -     |        |       |       |
| P0   | 3.90        | 4.00  | 4.10  | 0.154  | 0.157 | 0.161 |
| P1   | 7.90        | 8.00  | 8.10  | 0.311  | 0.315 | 0.319 |
| P2   | 1.95        | 2.00  | 2.05  | 0.077  | 0.079 | 0.081 |
| 10P0 | 39.80       | 40.00 | 40.20 | 1.567  | 1.575 | 1.583 |
| A0   | 6.85        | 6.95  | 7.05  | 0.269  | 0.273 | 0.276 |
| B0   | 7.15        | 7.25  | 7.35  | 0.280  | 0.284 | 0.288 |
| K0   | 1.95        | 2.05  | 2.15  | 0.076  | 0.080 | 0.084 |
| T    | 0.20        | 0.25  | 0.30  | 0.008  | 0.010 | 0.012 |

