

FUNCTION:

JST24E-1600BW triac is suitable for general purpose applications. It can be used as an ON/OFF function in circuits such as heating regulation, induction motor speed controllers, for phase control operation in light motor speed controllers. JST24E-1600BW triac is especially recommended for use on resistive loads. Package TO-263 is RoHS compliant.

Peak pulse voltage
(T

FIG.1: Maximum power dissipation versus RMS on-state current

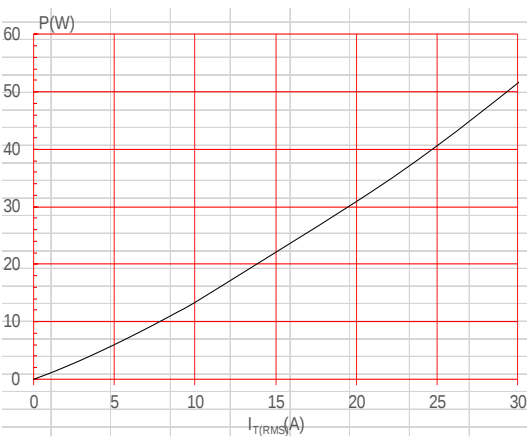


FIG.2: RMS on-state current versus case temperature

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

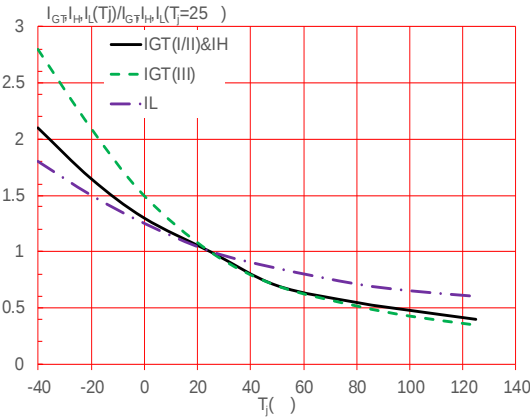


FIG.8: ie

JST24E-1600BW

