



T0650H-8E 6A TRIAC

Rev.A.1.0

DESCRIPTION:


650H-8E 6A TRIAC
by tabdada F in

P_{Dmax} ($T_j=25^{\circ}C$; $\theta_{JA}=100^{\circ}C/W$)	V_p	4	V
--	-------	---	---

ELECTRICAL CHARACTERISTICS

Symbol	Test Condition	Quadrant	Value		Unit
$I_{D(on)}$	$V_D = 12V$ $R_L = 33\Omega$ $T_j = 25^{\circ}C$	- -	$I_{D(on)}$	50	A
$V_{DS(on)}$		- -	$V_{DS(on)}$	1	V
$V_{DS(off)}$	$V_D = V_{DS}$ $R_L = 3.3k\Omega$ $T_j = 150^{\circ}C$	- -	$V_{DS(off)}$	0.2	V
$I_{L(on)}$	$I_L = 1.2A$	-	$I_{L(on)}$	70	A
		G - G		100	
$I_{H(on)}$	$I_T = 100mA$		$I_{H(on)}$	50	A

ORDERING INFORMATION

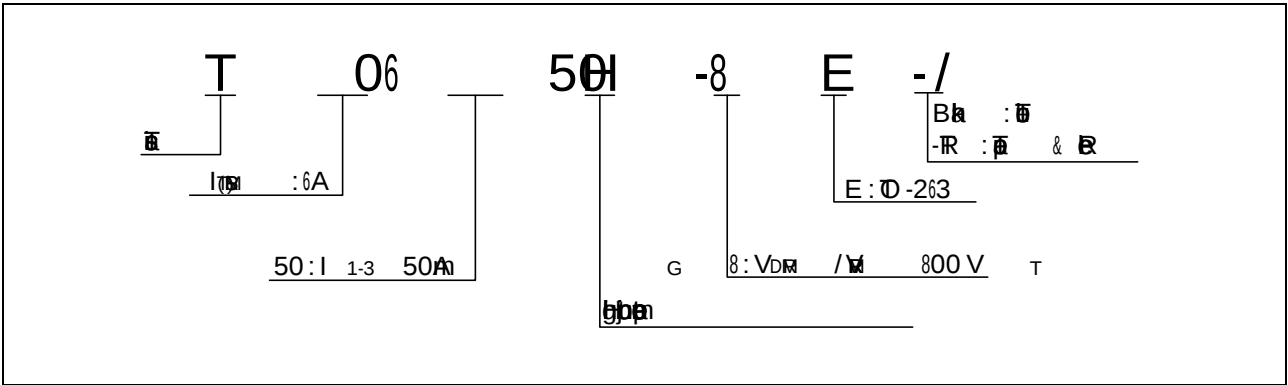

MARKING


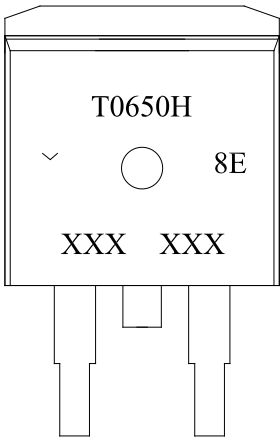


FIG.7: Pin 1 . 1 (g



DELIVERY MODE

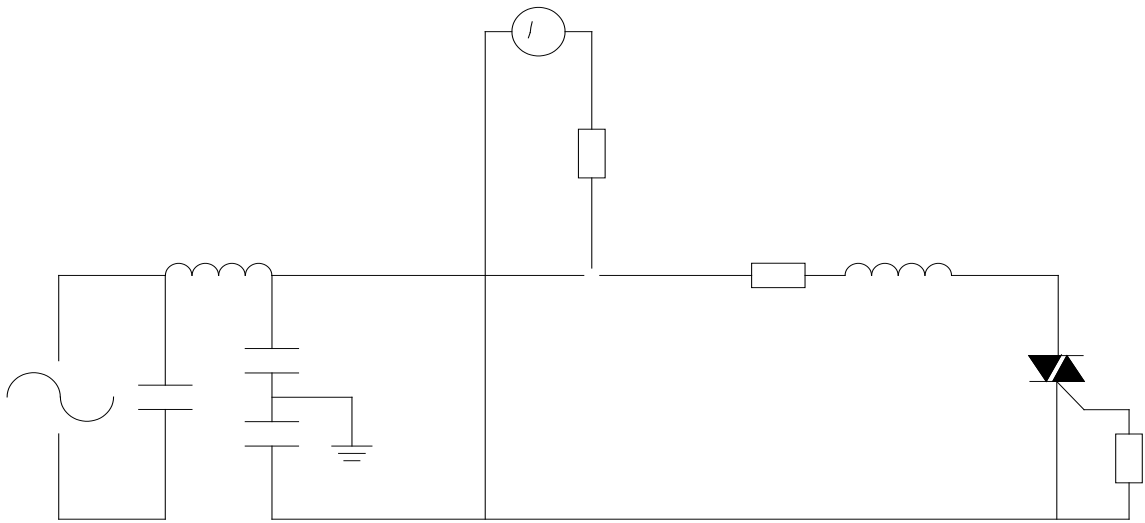

本文件是本公司内部文件，
仅供内部使用，不得外传。
如有违反，将追究法律责任。
本公司保留所有权利。
© 2018 JieJie Microelectronics Co., Ltd.